




RDWC

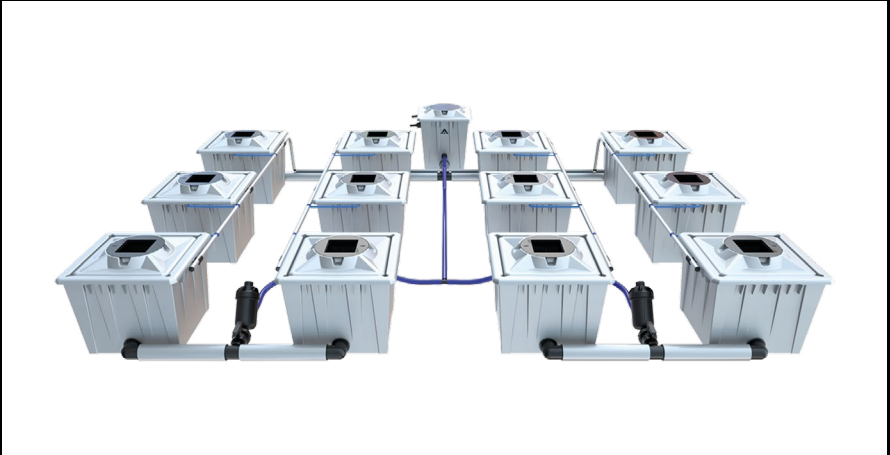

Designed, manufactured and distributed by

ALIEN[®]
THE EVOLUTION OF HYDROPONICS

SET UP INSTRUCTIONS 

Follow this step by step guide to complete the installation of your system.

SYSTEM SET-UP

- 1
to
6

Fit the 50mm threaded fittings into the holes at the bottom of the pots. The rubber washer must be on the outside. Secure the nut with the socket spanner provided.
- 6

Bird's eye view images are provided to explain which fittings to use on 2, 3 or 4 row systems
- 7

Fit a 50mm straight to the header pot and cut a piece of 50mm pipe. Fit a 50mm barbed tee. The header pot can be located outside of the grow room, however you may need extra pipe. Note, the silver 50mm pipe is available in 1m lengths only. Heat the ends of the pipe in some hot water. This will make fitting easier. The pipe can be fitted to the barb once. If removed and refitted the pipe will be stretched and will need a 60mm hose clamp. These are available on the website.

Note: The header pot is supplied with a single water pump for recirculating the system. If using a water chiller, a separate water pump is required and can be installed as shown. Follow the chiller manufacturers recommendations for pump sizing. The JET-STREAM™ water pumps can be purchased at alienhydroponics.co.uk

- 8
to
10

Place your pots in the desired location and measure the distance between the barbed fittings. Take note of the maximum recommended pipe lengths. Cut and fit the 50mm pipe. The blue 19mm pipe connects the barbed fitting on the filter to the black hose tail on the header pot.

As a guide: 20L pots are recommended for 4 pots per square meter.
36L pots are recommended for 4 pots per 1.2sqm.

Examples:

2 x 2m tent – 16 pot 20L system

2.4 x 2.4m tent – 16 pot 36L system

- 11

Place the air pump in the desired location and connect to the 16mm pipe.'

- 12

Fit the pot clips to the slot on the side of the pots.

- 13

Run a piece of pipe from the tee up to the pot clip and fit a blue airline connector as shown.

- 14
- 15
to
17

2, 3 and 4 row system airlines are shown here.

- 18







Complete the airline along each row and put a 16mm blank at the end of each line.


- 19
- 20
- 21

Place one Air Injection Ring in each pot. For the 36L system, suckers are provided to secure the ring to the bottom of the pot. For the 20L systems, the rings are held between the fittings. Connect the ring to the blue airline connector with blue 6mm pipe.


- 22

Place the lids and net pots in position. If your system is the 36L version then you also have the lid surrounds.

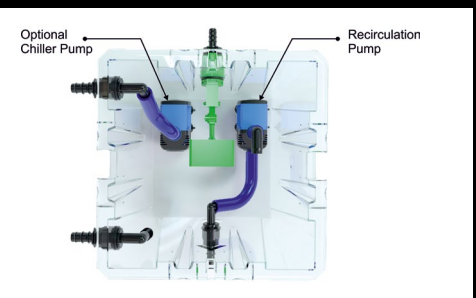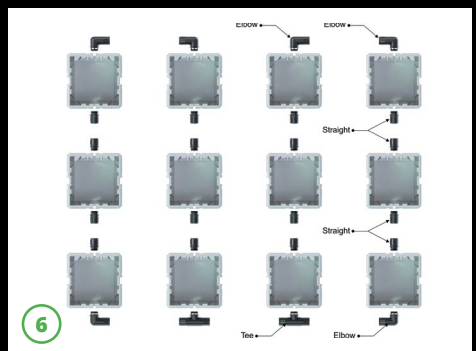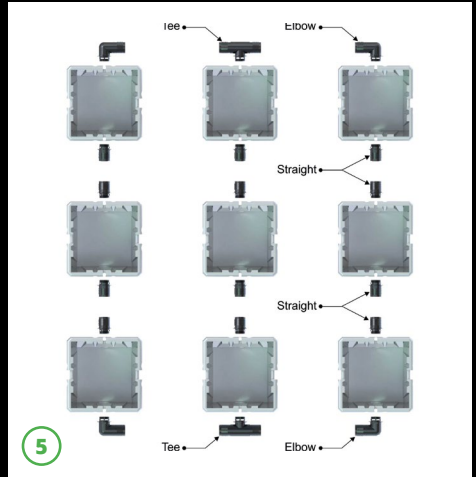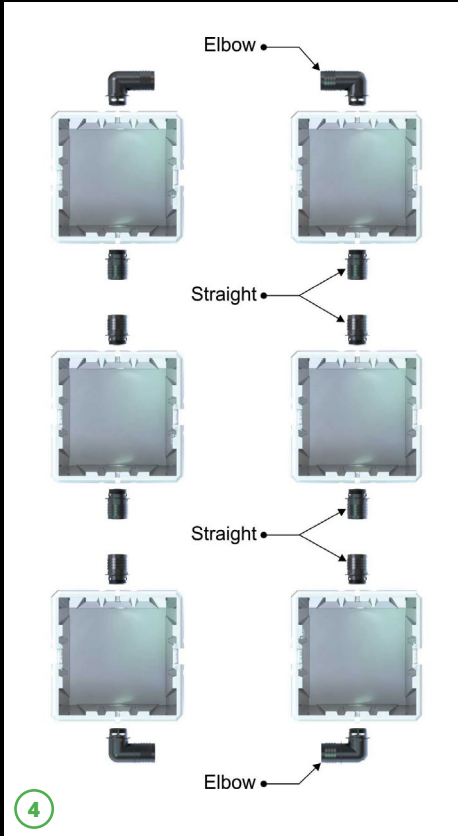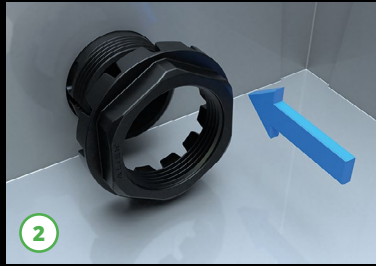


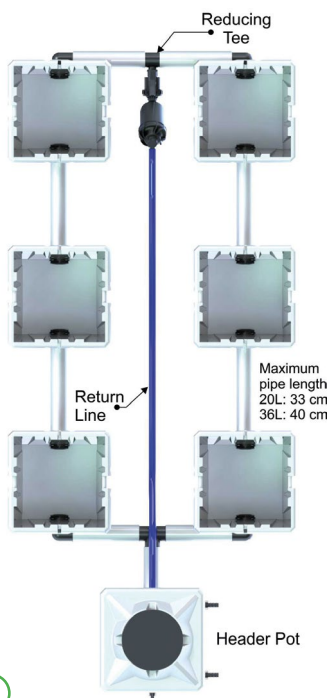





8

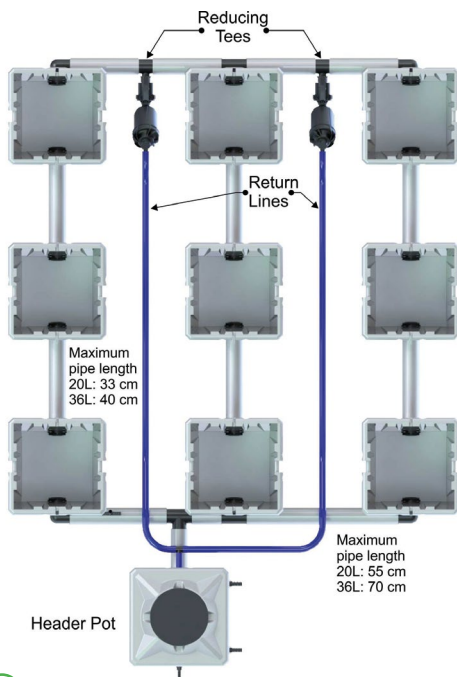


9

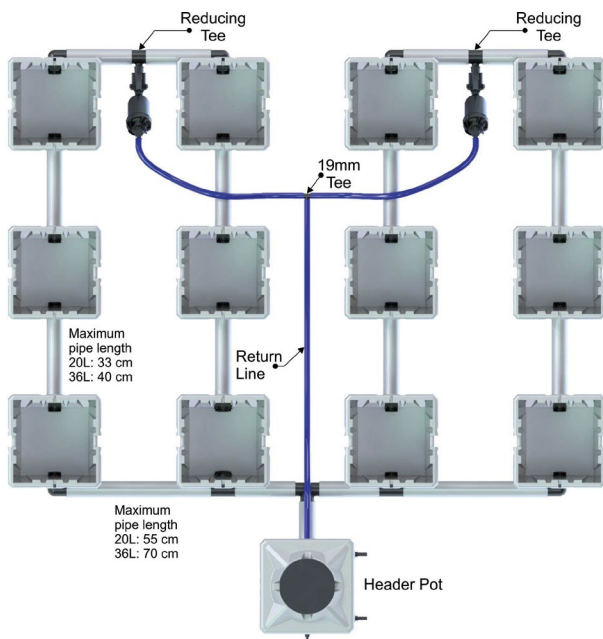

10

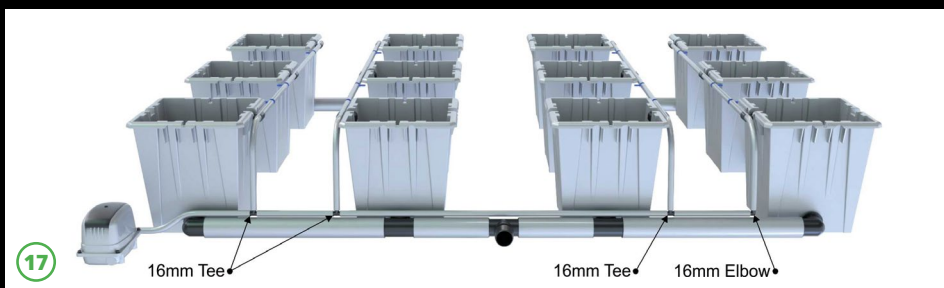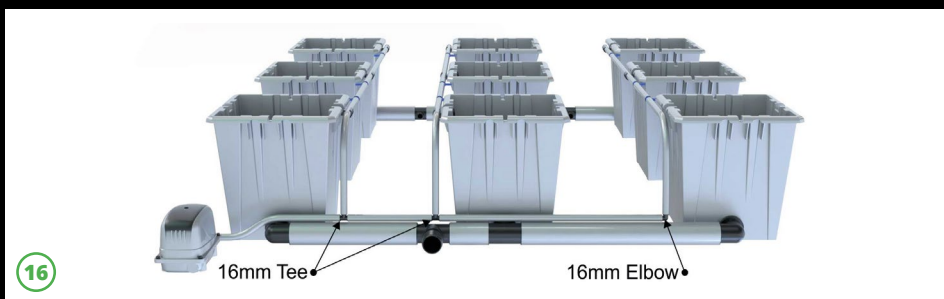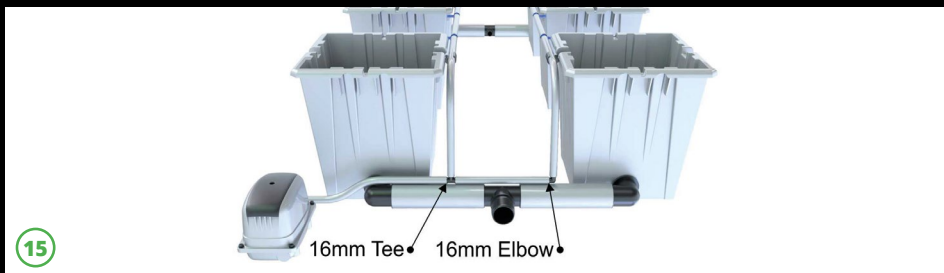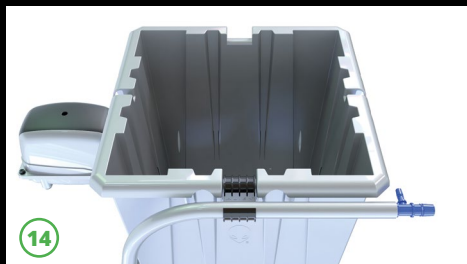

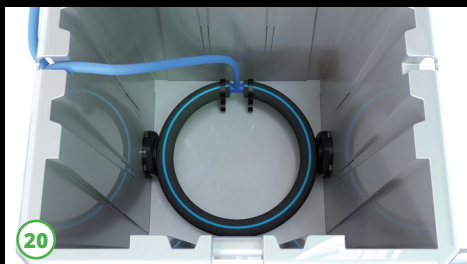

Water Chiller installation

- 23 If you are using a water chiller this diagram shows how to connect the pipes to the header pot. Ideally, the water temperature should be set to 18-20°C.

Tank

- 24a A top up reservoir can be used to maintain nutrient solution level in the system. Connect to the fitting on the back of the header pot.

24b

SYSTEM OPERATION

Filling the system

- 25 Use a hose pipe to fill the system. When the float valve in the header is level, the system is full. Loosen the cap on the top of the filter. This will release any air trapped in the filter. Then tighten. Do not turn the water pump on until the system is at least half full to avoid an air lock in the water pump. At this stage the tank can remain empty as small plants have enough nutrient solution in the system to support them for some time.

Adding Nutrients

- 26 Add nutrients directly to the header and let the system recirculate for some time before taking a reading. Adjust accordingly. Do the same for PH down.
- 27 Ideally let the system recirculate overnight to allow the water to reach a habitable temperature for the plants. Cold water can shock the plants.


Planting into the system

- 28 Put a layer of substrate into the bottom of the net pot level with the raised grid.
- 29 Water the cutting before transplanting. Place the rooted cutting into the pot and fill the remaining void with substrate.
- 31

Draining the system

- 32 To perform a nutrient change or to drain the system, simply connect a pipe to the barbed fitting on the recirculation pump. To refill the system you can use the tank to prepare a fresh batch the day before or if the tank isn't large enough then you can directly fill the system with a hose pipe as long as the water is at least 17 degrees so to avoid plant shock. If using the hose pipe method add a small amount of nutrients to the header as the system is filling.

Check the blog on alienhydroponics.co.uk for further info & updates.

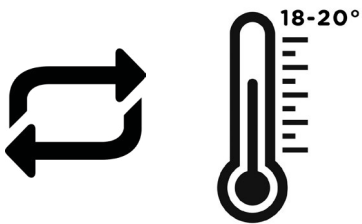

27



28



29




30



31

Connect Hose

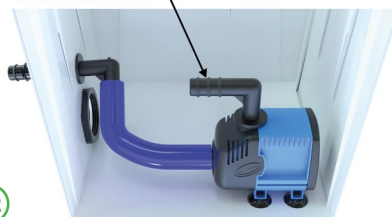

32

Use **ROOT ROT X™** in your system to prevent Pythium, maintain a healthy white root zone and sterilise water lines.

- ELIMINATES PYTHIUM
- BREAKS DOWN BIOFILM
- INHIBITS BIOFILM REGENERATION
- ROOTS STAY HEALTHY & WHITE
- DISSOLVES NUTRIENT BUILD-UP
- PH NEUTRAL

USES:

- CLEAN CUTTINGS
- FLUSHING STAGE
- POWDERY MILDEW
- STERILISE EQUIPMENT

Available online:

 alienhydroponics.co.uk

